



TOYOTA

FUTURE SERVICES

inf e-s

TOYOTA  
70

No.



TOYOTA

T  
URE SER

info@future-ser



TOYOTA  
70

1388

TOYOTA



TOYOTA

TOYOTA  
70

TOYOTA



ENGINE POWERED FORKLIFT  
**7 F G U / 7 F D U**  
P N E U M A T I C T I R E  
8,000 to 11,000 lbs. • *3,628 to 4,989 kg.*  
**S P E C I F I C A T I O N S**



INDUSTRIAL EQUIPMENT 

# 8,000 to 11,000 lbs. 3,628 to 4,989 kg • Standard Equipment

## SAFETY

- System of Active Stability (SAS)
  - Active control rear stabilizer
  - Active mast function controller
  - SAS operation monitor
  - SAS warning light and alarm
- Key lowering interlock
- Drift control system
- Double action parking brake
- Electric horn
- Neutral start safety switch
- Asbestos free components
- High visibility overhead guard
- Low noise emissions
- Adjustable front head lights and guards
- Front combination lights - includes clearance lights and turn signal
- High mount rear combination lights - includes brake, clearance back-up lights and turn signal
- Back up alarm

## PERFORMANCE

- 4.3 litre, 262 cu. in., overhead valve (OHV) V-6 gasoline engine
- 5.2 litre, 318 cu. in., overhead valve (OHV) 6-cyl. diesel engine (15Z)
- Gasoline/LPG dual fuel system
- Planetary drive axle
- Centralized Hydraulic Power-assist System (CHPS)
  - Power brakes
  - Hydrostatic power steering
  - Hydraulic functions
- Hydraulic valve lifters (gasoline engine only)
- Automatic 2 speed transmission
  - 2 speed torque converter design
  - 2 speeds forward, 2 speeds reverse
- Class III hook carriage (8000, 9000 & 10,000 lb models only)
- Class IV hook carriage (11,000 lb model only)
- Electric governor (gasoline engine only)
- Hydraulic oil cooler (available on 8000-11,000 lb diesel engine models) (standard with 4-way valve)
- High-efficiency radiator
- Radiator lint screen
- 8-inch cyclone air cleaner with external air intake mounted high on the overhead guard (OHG)
- Sedimentor (water separator) and suction filter (diesel engine models only)
- Automatic choke (gasoline engine models only)
- Alternator w/ integrated circuitry regulator
- Sealed starter (except diesel engine models)
- Air cleaner discharge valve
- Torque converter with oil cooler
- Transistorized ignition assembly (gasoline engine models only)
- UL "G" gasoline model
- UL "D" diesel model
- Low maintenance battery
- 3-way hydraulic control valve
- Anti-restart ignition key switch
- Air cleaner discharge valve
- Rubber mounted radiator
- High capacity alternator (except LPS models)

## OPERABILITY AND ERGONOMICS

- Strategically configured instrument display
- Integrated monitoring system
- Automatic fork leveling
- Memory tilt steering wheel
- Full hydrostatic power steering
- Two-spoke steering wheel
- Heavy duty non-slip floor mat
- Non-slip hand pad on engine hood
- Operator assist grip
- Wide entry steps
- Driver's 4-way adjustable ultra-comfort semi-suspension vinyl seat with adjustable lumbar support
- Large hood-mounted clipboard
- Dash integrated pen/pencil/cup holder
- Adjustable front headlights and guards
- Electronic shift control
- Integrated head light and turn signal lever
- Sealed closure engine hood with sound and heat insulation
- LPG fuel system with swing out LP tank bracket
- Fully oil charged lift cylinder (not available on FV mast)
- Wide view mast (V)
- Wide view carriage bars
- Load backrest extension
- Pendant-mounted pedals
- Independent brake & inching pedals
- Draw bar pin
- Rubber mounting for control valve
- Cowl mounted hydraulic control levers with rubber boot covers

## SERVICEABILITY

- Easy access no-tools floorboard
- Fully opening steel engine hood with sound and heat insulation
- Engine hood assist damper with lock device
- Easy access fuse box panel
- Easy access radiator cover and lint screen
- Easy access engine air filter
- Low maintenance battery

## OPTIONAL EQUIPMENT

- EZ pedal (foot directional control)
- Steel cab
- Canvas cab
- Engine protection system (except diesel engine models)
- Wide-view full free lift 2-stage mast (FV)
- Wide-view full free lift 3-stage mast (FSV)
- LPG fuel system with swing down tank bracket
- UL "LPS" model
- Class III hang on sideshifter (8000, 9000 & 10,000 lb models)
- Class IV hang on sideshifter (11,000 lb model only)
- LPG low-fuel warning light and alarm
- Keyless ignition switch
- Strobe light (yellow, clear, red or blue)
- Rear working light
- Rear view mirrors (left and right)
- Mast mounted headlights
- Upswept exhaust system
- 4-way hydraulic control valve
- Accumulator
- O.K. monitor
- Smart alarm
- Cloth suspension seat
- 3-way full suspension seat
- Anti-synching seat belt
- Pre-cleaner for air intake
- Box fin radiator
- Cooling fan booster (standard with 4-way valve)
- Sealed alternator (standard with LPS)
- Fire extinguisher
- Tapered forks
- Fully tapered and polished forks (FTP)
- Various load backrest extension heights
- Various carriage widths
- 3-way catalytic muffler system (LP only)
- Catalytic muffler (except with LPS models)
- Single brake pedal (standard with EZ pedal)
- Dual drive tires
- Front solid tires
- Rear solid tires
- Torque converter oil temp indicator
- Pencil/tape holder
- Operator compartment light
- Tilt cylinder boots

# 8,000 to 11,000 lbs. 3,628 to 4,989 kg • Specifications

Models		7FGU35	7FDU35	7FGU40	7FDU40	7FGU45	7FDU45	7FGU50	7FDU50
Load Capacity (with 24-in. load center)	lb. <i>kg</i>	8000 <b>3628</b>		9000 <b>4082</b>		10000 <b>4536</b>		11000 <b>4989</b>	
Body/Frame Construction		Welded steel body & frame							
Steering Type		Hydrostatic power steering							
Brakes		Hydraulic (foot)							
Transmission	Type	Powershift							
	Speed (forward/reverse)	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Engine	Make/Model	GM 4.3L	15Z	GM 4.3L	15Z	GM 4.3L	15Z	GM 4.3L	15Z
	Type	6-cyl. OHV gasoline	6-cyl. OHV diesel	6-cyl. OHV gasoline	6-cyl. OHV diesel	6-cyl. OHV gasoline	6-cyl. OHV diesel	6-cyl. OHV gasoline	6-cyl. OHV diesel
Piston Displacement	cu. in. <i>cc.</i>	262 <b>4293</b>	318 <b>5204</b>	262 <b>4293</b>	318 <b>5204</b>	262 <b>4293</b>	318 <b>5204</b>	262 <b>4293</b>	318 <b>5204</b>
Rated Horsepower/r.p.m. Net	SAE HP <i>kW</i>	90/2350 <b>68/2350</b>	82/2200 <b>60/2200</b>	90/2350 <b>68/2350</b>	82/2200 <b>60/2200</b>	90/2350 <b>68/2350</b>	82/2200 <b>60/2200</b>	90/2350 <b>68/2350</b>	82/2200 <b>60/2200</b>
Rated Torque/r.p.m. Net	SAE ft.-lb. <i>N-m</i>	209/1200 <b>283/1200</b>	206/1800 <b>280/1800</b>	209/1200 <b>283/1200</b>	206/1800 <b>280/1800</b>	209/1200 <b>283/1200</b>	206/1800 <b>280/1800</b>	209/1200 <b>283/1200</b>	206/1800 <b>280/1800</b>

## EXTERIOR DIMENSIONS

		in.	mm.	120	3048	120	3048	120	3048	120	3048	120	3048	120.5	3060	120.5	3060
A	Maximum Fork Height (MFH)			120	3048	120	3048	120	3048	120	3048	120	3048	120.5	3060	120.5	3060
B	Mast Lowered Height			83	2108	83	2108	83	2108	83	2108	86.5	2197	86.5	2197	96.5	2451
C	Free Lift			4.3	109	4.3	109	4.3	109	4.3	109	4.5	114	4.5	114	4.7	119
D	Load Distance*			20.5	520	20.5	520	20.5	520	20.5	520	22.4	569	22.4	569	23	584
E	Wheelbase			72.4	1839	72.4	1839	72.4	1839	72.4	1839	78.7	1999	78.7	1999	78.7	1999
F	Fork Size (TxWxL)			2x6x42	51x152x1066	2x6x42	51x152x1066	2x6x42	51x152x1066	2x6x42	51x152x1066	2x6x42	51x152x1066	2x6x42	51x152x1066	2.6x6x48	66x152x1219
G	Length to Fork Face			115	2921	115	2921	117.1	2974	117.1	2974	123	3124	123	3124	125.4	3185
H	Overhead Guard Height			86.2	2189	86.2	2189	86.2	2189	86.2	2189	90	2286	90	2286	90	2286
I	Tilt Range (forward/backward)			6/12		6/12		6/12		6/12		6/12		6/12		6/12	
J	Outside Turning Radius			101.8	2585	101.8	2585	104.3	2649	104.3	2649	108.3	2751	108.3	2751	110.2	2799
K	Basic Right Angle Stacking Aisle Width**			122.2	3104	122.2	3104	124.8	3170	124.8	3170	130.7	3319	130.7	3319	133.2	3383
L	Overall Width			53.1	1348	53.1	1348	53.1	1348	53.1	1348	57.1	1450	57.1	1450	57.1	1450
M	Carriage Width			46.1	1171	46.1	1171	46.1	1171	46.1	1171	45.7	1160	45.7	1160	45.7	1160
N	Tread Width	front/rear	Std.	in.	mm.	43.9/43.3	1115/1100	43.9/43.3	1115/1100	43.9/43.3	1115/1100	43.9/43.3	1115/1100	45.3/43.3	1150/1100	45.3/43.3	1150/1100

## PERFORMANCE DATA

Maximum Travel Speed	forward—full load	m.p.h. <i>km/h</i>	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22
	reverse—full load	m.p.h. <i>km/h</i>	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22	13.7	22
	forward—no load	m.p.h. <i>km/h</i>	15	24	15	24	15	24	15	24	15	24	15	24	15	24	15	24
	reverse—no load	m.p.h. <i>km/h</i>	15	24	15	24	15	24	15	24	15	24	15	24	15	24	15	24
Lift Speed (V Mast only)	full load	f.p.m. <i>mm/sec</i>	101	513	101	513	101	513	101	513	87.1	442	95	482	87.1	442	95	482
	no load	f.p.m. <i>mm/sec</i>	109	553	109	553	109	553	109	553	95	482	103	523	95	482	103	523
Lowering Speed (V Mast only)	full load	f.p.m. <i>mm/sec</i>	99	503	99	503	99	503	99	503	99	503	99	503	99	503	99	503
	no load	f.p.m. <i>mm/sec</i>	109	553	109	553	109	553	109	553	99	503	99	503	99	503	99	503
Maximum Drawbar Pull	full load	lb. <i>N</i>	7900	35,141	8350	37,142	7900	35,141	8350	37,142	7900	35,141	8350	37,142	7900	35,141	8350	37,142
	no load	lb. <i>N</i>	3090	13,745	3090	13,745	3090	13,745	3090	13,745	3750	16,680	3750	16,680	3970	17,659	3970	17,659
Maximum Gradeability	full load	%tan	42		43		38		39		34		35		31		32	
	no load	%tan	22		21		19		19		22		22		22		22	

## UNDERCLEARANCE

Minimum with Load	in.	mm.	4.7	119	4.7	119	4.7	119	4.7	119	4.7	119	4.7	119	4.7	119
Center of Wheelbase	in.	mm.	7.5	190	7.5	190	7.5	190	7.5	190	8.3	210	8.3	210	8.3	210

## TRUCK WEIGHTS

Gross Weight (empty)		lb. <i>kg</i>	12460	5652	12740	5779	13320	6042	13610	6173	14580	6613	14930	6772	15950	7235	16300	7394
Weight Distribution	front—full load	lb. <i>kg</i>	18160	8237	18200	8255	19550	8868	19600	8890	21940	9952	22070	10011	24300	11022	24430	11081
	rear—full load	lb. <i>kg</i>	2300	1043	2540	1152	2770	1256	3010	1365	2640	1197	2860	1297	2650	1202	2870	1302
	front—no load	lb. <i>kg</i>	5250	2381	5290	2400	5030	2282	5070	2300	6040	2740	6180	2803	6730	3053	6860	3112
	rear—no load	lb. <i>kg</i>	7210	3270	7450	3379	8290	3760	8540	3874	8540	3874	8750	3969	9220	4182	9440	4282

## CAPACITY

Fuel Tank	US gal. <i>IM gal</i> <i>Litre</i>	27.7	23.1	105	27.7	23.1	105	27.7	23.1	105	27.7	23.1	105	31.7	26.4	120	31.7	26.4	120
-----------	------------------------------------	------	------	-----	------	------	-----	------	------	-----	------	------	-----	------	------	-----	------	------	-----

## ATTACHMENT

Attachment Operating Hydraulic Pressure	p.s.i. <i>Mpa</i>	2630	18	2630	18	2630	18	2630	18	2630	18	2630	18	2630	18	2630	18
---	-------------------	------	----	------	----	------	----	------	----	------	----	------	----	------	----	------	----


## TIRES

Type (front/rear)		Pneumatic/Pneumatic		Pneumatic/Pneumatic		Pneumatic/Pneumatic		Pneumatic/Pneumatic	
Numbers (front/rear)		2/2		2/2		2/2		2/2	
Size	Drive <i>Front</i>	250-15-16PR (I)		250-15-16PR (I)		300-15-18PR (I)		300-15-18PR (I)	
	Steer <i>Rear</i>	7.00-12-12PR (I)		7.00-12-12PR (I)		7.00-12-12PR (I)		7.00-12-14PR (I)	

\* Centerline of front axle to front face of forks.

\*\* Add load length and clearance.

# 8,000 to 11,000 lbs. 3,628 to 4,989 kg • Mast Specifications

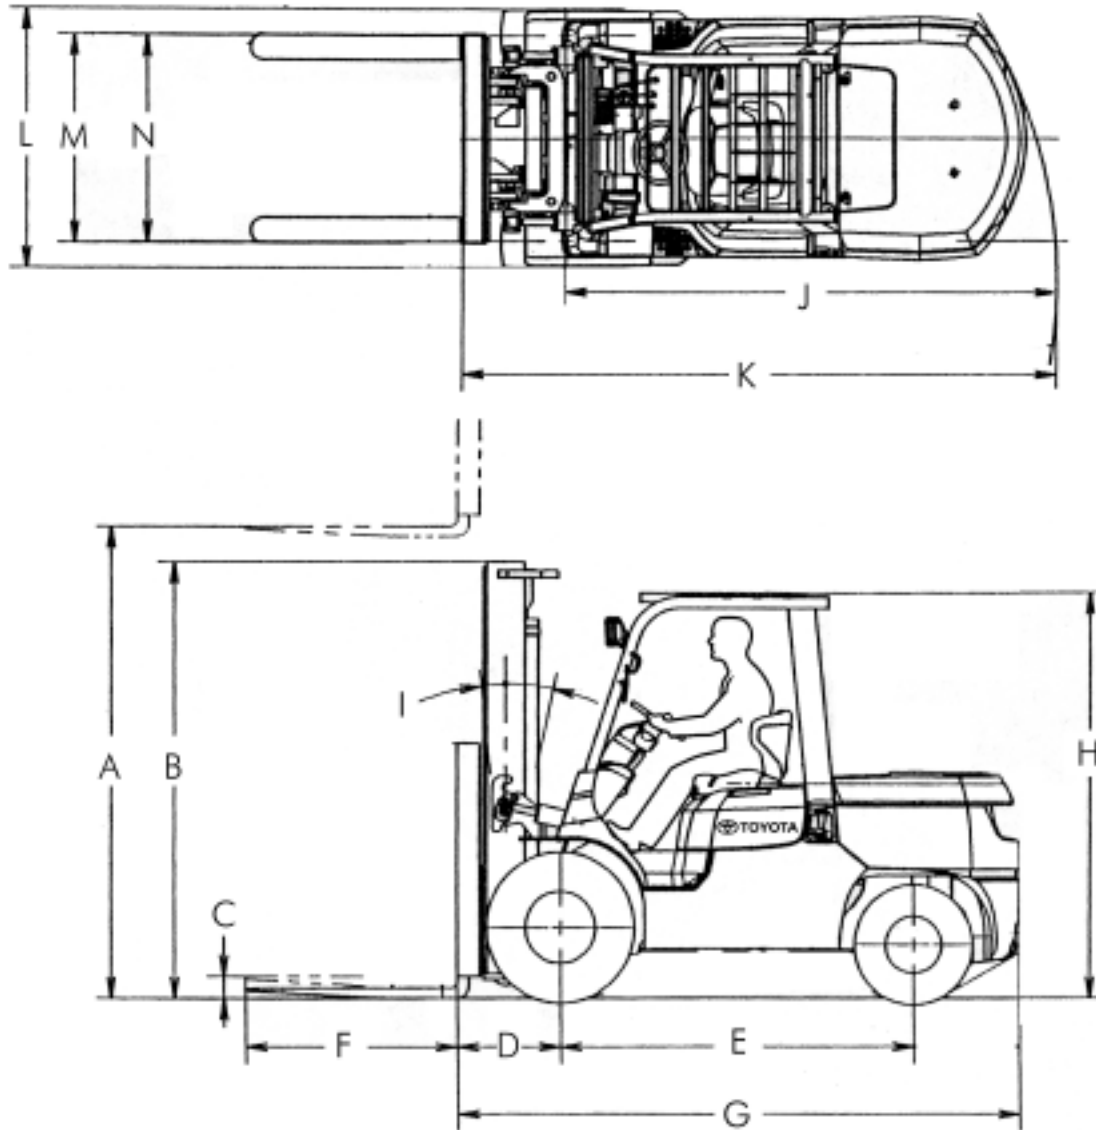

## 7FGU/7FDU35 AND 7FGU/7FDU40

Mast Type	Maximum Fork Height	Overall Height						Free Lift				7FGU/7FDU35				7FGU/7FDU40						
		Lowered	Extended				Without Load Backrest		With Standard Load Backrest		Tilt Range		Load Capacity @ 24 in.		Tilt Range		Load Capacity @ 24 in.		Tilt Range		Load Capacity @ 24 in.	
			Without Load Backrest	With Standard Load Backrest	Without Load Backrest	With Standard Load Backrest	FWD	BWD	FWD	BWD	FWD	BWD	FWD	BWD	FWD	BWD	FWD	BWD	FWD	BWD	FWD	BWD
			in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	deg.	deg.	lbs. kg	deg.	deg.	lbs. kg	deg.	deg.	lbs. kg	deg.	deg.	lbs. kg	deg.	deg.
V	120 3048	83 2108	151.6 3851	168.1 4270	4.3 109	4.3 109	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
	131.5 3340	90.2 2291	163.4 4150	179.9 4569	4.3 109	4.3 109	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
	139.5 3543	94.1 2390	171.3 4351	187.8 4770	4.3 109	4.3 109	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
	147.5 3747	98 2489	179.1 4549	195.7 4971	4.3 109	4.3 109	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
	159 4039	107.9 2747	190.9 4849	207.5 5271	4.3 109	4.3 109	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
	179 4547	117.7 2990	210.6 5349	227.2 5771	4.3 109	4.3 109	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
	198.5 5042	127.6 3241	230.3 5850	246.9 6271	4.3 109	4.3 109	6	6	7800 3538	6	6	7800 3538	6	6	7940 3601	6	12	9000 4082	6	12	9000 4082	
218.5 5550	139.4 3541	250 6350	266.5 6769	4.3 109	4.3 109	6	6	6950 3152	6	6	7400 3338	6	6	6100 2767	6	12	8200 3719	6	12	8200 3719		
FV	120 3048	83.1 2111	152.8 3881	168.1 4270	50.4 1280	35 889	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
	131.5 3340	90.2 2291	164.6 4181	179.9 4569	57.5 1461	42.1 1069	6	12	8000 3628	6	12	8000 3628	6	12	9000 4082	6	12	9000 4082	6	12	9000 4082	
FSV	159 4039	78.4 1991	192.1 4879	207.5 5271	45.7 1161	30.3 770	6	6	8000 3628	6	6	8000 3628	6	6	9000 4082	6	6	9000 4082	6	6	9000 4082	
	171 4343	83.1 2111	203.9 5179	219.3 5570	50.4 1280	35 889	6	6	8000 3628	6	6	8000 3628	6	6	9000 4082	6	6	9000 4082	6	6	9000 4082	
	187 4750	90.2 2291	219.7 5580	235 5969	57.5 1461	42.1 1069	6	6	7700 3493	6	6	7700 3493	6	6	8800 3991	6	6	9000 4082	6	6	9000 4082	
	198.5 5042	94.1 2390	231.5 5880	246.9 6271	61.4 1560	46.1 1171	6	6	7500 3402	6	6	7500 3402	6	6	7500 3402	6	6	9000 4082	6	6	9000 4082	
	218.5 5550	100 2540	251.2 6380	266.5 6769	67.3 1709	52 1321	6	6	6200 2812	6	6	7250 3289	6	6	5730 2599	6	6	9000 4082	6	6	9000 4082	
	238 6045	107.9 2741	270.9 6881	286.2 7269	75.2 1910	59.8 1519	6	6	4600 2087	6	6	7050 3198	6	6	4520 2050	6	6	7280 3302	6	6	7280 3302	

Note: Height of standard load backrest extension is 48 in. / 1220 mm

# 8,000 to 11,000 lbs. 3,628 to 4,989 kg • Mast Specifications

## 7FGU/7FDU45

Mast Type	Maximum Fork Height	Overall Height				Free Lift		Single Tire			Dual Tire		
		Lowered	Extended		Without Load Backrest	With Standard Load Backrest	Tilt Range		Load Capacity @ 24 in. Load Center	Tilt Range		Load Capacity @ 24 in. Load Center	
			Without Load Backrest	With Standard Load Backrest			FWD	BWD		FWD	BWD		
			in. mm	in. mm			deg.	deg.		lbs. kg	deg.		deg.
V	120 <b>3048</b>	86.6 <b>2200</b>	146.7 <b>3726</b>	168.1 <b>4270</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	12	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
	131.5 <b>3340</b>	92.5 <b>2350</b>	158.5 <b>4026</b>	179.9 <b>4569</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	12	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
	139.5 <b>3543</b>	96.5 <b>2451</b>	166.3 <b>4224</b>	187.8 <b>4770</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	12	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
	147.5 <b>3747</b>	102.4 <b>2601</b>	174.2 <b>4425</b>	195.7 <b>4971</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	12	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
	159 <b>4039</b>	110.2 <b>2799</b>	186 <b>4724</b>	207.5 <b>5271</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	12	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
	179 <b>4547</b>	120.1 <b>3051</b>	205.7 <b>5225</b>	227.2 <b>5771</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	6	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
	198.5 <b>5042</b>	129.9 <b>3299</b>	225.4 <b>5725</b>	246.9 <b>6271</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	6	8850 <b>4014</b>	6	12	9750 <b>4423</b>	
218.5 <b>5550</b>	139.8 <b>3551</b>	245.1 <b>6226</b>	266.5 <b>6769</b>	4.3 <b>109</b>	4.3 <b>109</b>	6	6	6200 <b>2812</b>	6	12	8850 <b>3992</b>		
FV	120 <b>3048</b>	86.6 <b>2200</b>	147.2 <b>3739</b>	168.1 <b>4270</b>	59.5 <b>1511</b>	38.6 <b>980</b>	6	12	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
	131.5 <b>3340</b>	92.5 <b>2350</b>	159.1 <b>4041</b>	179.9 <b>4569</b>	65.4 <b>1661</b>	44.5 <b>1130</b>	6	12	10000 <b>4536</b>	6	12	10000 <b>4536</b>	
FSV	159 <b>4039</b>	83.5 <b>2121</b>	186.8 <b>4745</b>	207.5 <b>5271</b>	56.3 <b>1430</b>	35.4 <b>899</b>	6	6	10000 <b>4536</b>	6	6	10000 <b>4536</b>	
	171 <b>4343</b>	86.6 <b>2200</b>	198.6 <b>5044</b>	219.3 <b>5570</b>	59.5 <b>1511</b>	38.6 <b>980</b>	6	6	9750 <b>4423</b>	6	6	9750 <b>4423</b>	
	187 <b>4750</b>	92.5 <b>2350</b>	214.4 <b>5446</b>	235 <b>5969</b>	65.4 <b>1661</b>	44.5 <b>1130</b>	6	6	9300 <b>4218</b>	6	6	9700 <b>4400</b>	
	198.5 <b>5042</b>	96.5 <b>2451</b>	226.2 <b>5745</b>	246.9 <b>6271</b>	69.3 <b>1760</b>	48.4 <b>1229</b>	6	6	8800 <b>3992</b>	6	6	9450 <b>4286</b>	
	218.5 <b>5550</b>	102.4 <b>2601</b>	245.9 <b>6246</b>	266.5 <b>6769</b>	75.2 <b>1910</b>	54.3 <b>1379</b>	6	6	6650 <b>3016</b>	6	6	9000 <b>4082</b>	
	238 <b>6045</b>	110.2 <b>2799</b>	265.6 <b>6746</b>	286.2 <b>7269</b>	83.1 <b>2111</b>	62.2 <b>1580</b>	6	6	5150 <b>2336</b>	6	6	8600 <b>3901</b>	

Note: Height of standard load backrest extension is 48 in. / 1220 mm

## 7FGAU/7FDAU50

Mast Type	Maximum Fork Height	Overall Height				Free Lift		Single Tire			Dual Tire		
		Lowered	Extended		Without Load Backrest	With Standard Load Backrest	Tilt Range		Load Capacity @ 24 in. Load Center	Tilt Range		Load Capacity @ 24 in. Load Center	
			Without Load Backrest	With Standard Load Backrest			FWD	BWD		FWD	BWD		
			in. mm	in. mm			deg.	deg.		lbs. kg	deg.		deg.
V	120.5 <b>3061</b>	96.5 <b>2451</b>	153.7 <b>3904</b>	174.6 <b>4435</b>	4.9 <b>124</b>	4.9 <b>124</b>	6	12	11000 <b>4989</b>	6	12	11000 <b>4989</b>	
	132 <b>3353</b>	102.4 <b>2601</b>	165.6 <b>4206</b>	186.4 <b>4735</b>	4.9 <b>124</b>	4.9 <b>124</b>	6	12	11000 <b>4989</b>	6	12	11000 <b>4989</b>	
	140 <b>3556</b>	110.2 <b>2799</b>	173.4 <b>4404</b>	194.3 <b>4935</b>	4.9 <b>124</b>	4.9 <b>124</b>	6	12	11000 <b>4989</b>	6	12	11000 <b>4989</b>	
	148 <b>3759</b>	110.2 <b>2799</b>	181.3 <b>4605</b>	202.2 <b>5136</b>	4.9 <b>124</b>	4.9 <b>124</b>	6	12	11000 <b>4989</b>	6	12	11000 <b>4989</b>	
	159.5 <b>4051</b>	120.1 <b>3051</b>	193.1 <b>4905</b>	214 <b>5436</b>	4.9 <b>124</b>	4.9 <b>124</b>	6	12	11000 <b>4989</b>	6	12	11000 <b>4989</b>	
	179.5 <b>4559</b>	129.9 <b>3299</b>	212.8 <b>5405</b>	233.7 <b>5936</b>	4.9 <b>124</b>	4.9 <b>124</b>	6	6	11000 <b>4989</b>	6	12	11000 <b>4989</b>	
	199 <b>5055</b>	139.8 <b>3551</b>	232.5 <b>5906</b>	253.4 <b>6436</b>	4.9 <b>124</b>	4.9 <b>124</b>	6	6	9000 <b>4082</b>	6	12	10600 <b>4808</b>	
FSV	159.5 <b>4051</b>	89.4 <b>2271</b>	194.3 <b>4935</b>	214 <b>5436</b>	55.1 <b>1400</b>	35.4 <b>899</b>	6	6	10800 <b>4899</b>	6	6	10800 <b>4899</b>	
	171.5 <b>4356</b>	92.5 <b>2350</b>	206.1 <b>5235</b>	225.8 <b>5735</b>	58.3 <b>1481</b>	38.6 <b>980</b>	6	6	10600 <b>4808</b>	6	6	10600 <b>4808</b>	
	187.5 <b>4763</b>	96.5 <b>2451</b>	221.9 <b>5636</b>	241.5 <b>6134</b>	62.2 <b>1580</b>	42.5 <b>1080</b>	6	6	9500 <b>4309</b>	6	6	10200 <b>4627</b>	
	199 <b>5055</b>	102.4 <b>2601</b>	233.7 <b>5936</b>	253.4 <b>6436</b>	68.1 <b>1730</b>	48.4 <b>1229</b>	6	6	9000 <b>4082</b>	6	6	10000 <b>4536</b>	
	219 <b>5563</b>	110.2 <b>2799</b>	253.4 <b>6436</b>	273 <b>6934</b>	76 <b>1930</b>	56.3 <b>1430</b>	6	6	6800 <b>3084</b>	6	6	9500 <b>4309</b>	
	238.5 <b>6058</b>	120.1 <b>3051</b>	273 <b>6934</b>	292.7 <b>7435</b>	85.8 <b>2179</b>	66.1 <b>1679</b>	6	6	5300 <b>2404</b>	6	6	9000 <b>4082</b>	

Note: Height of standard load backrest extension is 54 in. / 1372 mm



Virtually all Toyota 6-Series lift trucks sold in North America are manufactured and assembled at our state-of-the-art manufacturing facility in Columbus, Indiana. Toyota Industrial Equipment Manufacturing (TIEM) has attained ISO 14001 certification for environmental compliance and ISO 9001 for quality management excellence.



TOYOTA CANADA INC. (TCI) has received ISO 14001 certification for its Toronto, Ontario based head office facilities and parts distribution centre. This internationally recognized certification illustrates Toyota's global commitment to protecting the environment.

Established in 1970, Toyota Canada Inc., Industrial Equipment Division (TCI-IED), headquartered in Toronto, Ontario, is the only major lift truck supplier to have a head office and parts distribution centre in Canada dedicated to supporting the Canadian market.

Toyota's commitment to customer service extends nationwide. Thirty-two authorized Toyota Industrial Equipment Dealer facilities located throughout Canada offer comprehensive customer support including one-stop shopping for lift trucks, genuine Toyota parts and Toyota University accredited service technicians.

Not only is Toyota committed to Canada, but is proud of its overall commitment to North America, which includes:

- Direct North American employment: 38,041
- Direct North American Investment: CDN \$20.3 B

We are committed to supporting our products, and most importantly, our customers.

For more information contact your local authorized Toyota Industrial Equipment dealer, fax Toyota direct at **1-800-592-3851**, or visit the Toyota Industrial Equipment web site at **[www.forklift.toyota.ca](http://www.forklift.toyota.ca)**.

Some product features here-in are optional. Please contact your dealer for specifications.

Details of specifications are based on information available at time of printing and may change without notice.



**ISO 14001**

**TOYOTA CANADA INC.**

March 2008

7FGDU-350ES-25