



FUTURE
SERVICES

FUTURE SERVICES
info@future
services.net
www.future-services.net

30 R

TEN

SS BOX

TOKE SERVICE
2420

PORTABLE RESTROOMS
912



25 5:26PM

Standard and Integra Units

Multiple choices for the same price; you choose the features that are best for your business.



STANDARD 1

- Standard aluminum-framed door
- Standard traditional roof
- Multiple skid options

STANDARD 2

- Standard aluminum-framed door
- Keystone skybox roof
- Multiple skid options



INTEGRA 1

- Extra-wide Integra door
- Standard traditional roof
- Multiple skid options

INTEGRA 2

- Extra-wide Integra door
- Keystone skybox roof
- Multiple skid options



Choose from any of these standard colors, or request a custom color on orders of 100 or more.

	White/Gray
	Aqua
	Yellow
	Orange
	Blue
	Tan
	Green
	Silver
	Red
	Gray
	Dark Blue
	Lemon/Lime
	Purple
	Pink



Orders or questions? Call (800) 241-7951 or (706) 864-3776

For actual color samples, ask your division manager.

10 reasons why PolyPortables has set the industry standard for more than 30 years...

- 
1. Single-piece white top is the thickest top in the industry; every top has more than the recommended amount of UV protection.
 2. Vent stack is placed at the most advantageous position to control odor.
 3. Door latch is rigid and tough under normal pressure but will bend with abuse or in an emergency. There's never a need to break in a locked door.
 4. Occupied indicator retracts to "unoccupied" automatically; no empty units marked "in use".
 5. High-wear components like plastic floor covers and screens are easily replaced to save you money.
 6. Modular, all-common wall construction makes for easy and inexpensive repairs. High molecular-weight polyethylene with extra UV protection ensures wall longevity.
 7. No fading or premature failure due to shortcuts in materials buying or plastics molding. We ensure long-term quality by controlling the whole process in our own plant.
 8. Walls are strong enough to withstand impact, but flexible enough to avoid cracking and splitting.
 9. Handholds are molded in anywhere you grab hold along the edges for fast, easy moving.
 10. Riveted corner moldings stand up to transport stress and abusive field conditions; aluminum rivets guarantee holding power without rust.

RESTROOMS


HAND-WASH STATIONS

RESTROOM ACCESSORIES

DEODORIZERS

CLEANERS

TRUCKS

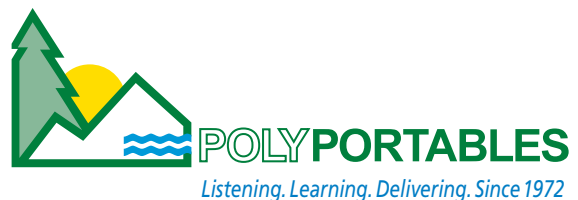

99 Crafton Drive, Dahlonega, GA 30533 USA
Phone (800)241-7951 or (706)864-3776 • Fax (706)864-8111
www.polyportables.com

Standard and Integra Units

PolyPortables gives you units with interchangeable parts and accessories—not a collection of oddities.



All PolyPortables' standard size units include a Pro60 Tank, urinal and toilet paper holder

Every PolyPortables' standard size unit comes with a ProServe60 tank... still called the best portable restroom tank on the market. Here's why!

- Proper odor control is achieved by placing the large 4" vent stack at the highest point.
- Small urinal surface lessens evaporation odors. The urinal is directly connected to the tank; no hoses or connectors to fail.
- Tank bottom fits tightly on the floor; no gaps for snakes and rodents to enter.
- Deep sump under the seat provides coverage with a minimal charge of water and odor control from the first use.
- Molded indents for rivets eliminate costly and embarrassing waste leakage. There is no riveting through the tank's sides.
- Seat positioned as far from urinal as possible to keep odors away from user's face.
- Smooth surfaces inside and out for fast easy servicing. No ledges to catch waste, so there's no need to use hands for cleaning; just your wand.



Aluminum Frame Steel-Reinforced Standard Door

- Steel tubing is inserted into both edges of the door for unsurpassed strength and durability.
- Hinges are riveted to the metal on the door and the frame for extra holding power.
- Precision-engineered door spring has been repeatedly tested for long wear.

Extra-Wide, Full-Edge Hinge Integra Door

- Twin torsion spring closures are heavy-gauge stainless steel
- Door and jamb form their own hinge, joined by a polycarbonate rod
- The Integra door offers the largest door opening of any standard unit.



All PolyPortables' standard size units feature a polycarbonate door slide. It's rigid and tough under pressure, but will bend with abuse or in an emergency.



Standard and Integra Units

Choose the roof and door options you prefer...

 <p>A B</p>	<p>ROOFS</p> <p>A) Sleek, slim, traditional Standard Roof</p> <p>B) Tall, modern, Keystone skybox Roof</p>
 <p>A B</p>	<p>DOORS</p> <p>A) Aluminum frame, steel-reinforced Standard Door</p> <p>B) Extra-wide, full-edge hinge Integra Door</p>
	<p>FLOOR/SKID</p> <p>All-plastic, one-piece Molded Skid is standard. Other skid options are available.</p>

STANDARD AND INTEGRA SPECIFICATIONS

Height with Traditional Roof	80" (2.03 m) inside, 89.25" (2.27 m) outside
Height with Keystone Roof	83.50" (2.12 m) inside, 92" (2.34 m) outside
Base	41" x 41" (1.04 m x 1.04 m) inside, 43" x 47" (1.09 m x 1.19 m) outside
Door Height	79" (2.01 m)
Traditional Roof	43.75" (1.11 m) x 43.75" (1.11 m)
Keystone Roof	44" (1.12 m) x 44" (1.12 m)
Weight with wood skid	200 lbs (90.72 kg)
Weight with molded skid	161 lbs (73.03 kg)
Diplomat interior upgrades	Add 40 lbs (18.14 kg) to total weight
Ambassador interior upgrades	Add 43 lbs (19.50 kg) to total weight
Tank capacity	60 gallons (227.12 liters)
Material	High Molecular Weight Polyethylene