



FUTURE SERVICES

info@future-services.net

FLAMMABLE

الاشتعال

JP-8



FUTURE SERVICES

info@future-services.net

FLAMMABLE

الاشتعال



لا تترك النار أو الشرارة بالقرب من
هذه العبوة مع احتياطات السلامة

201

الاشتعال





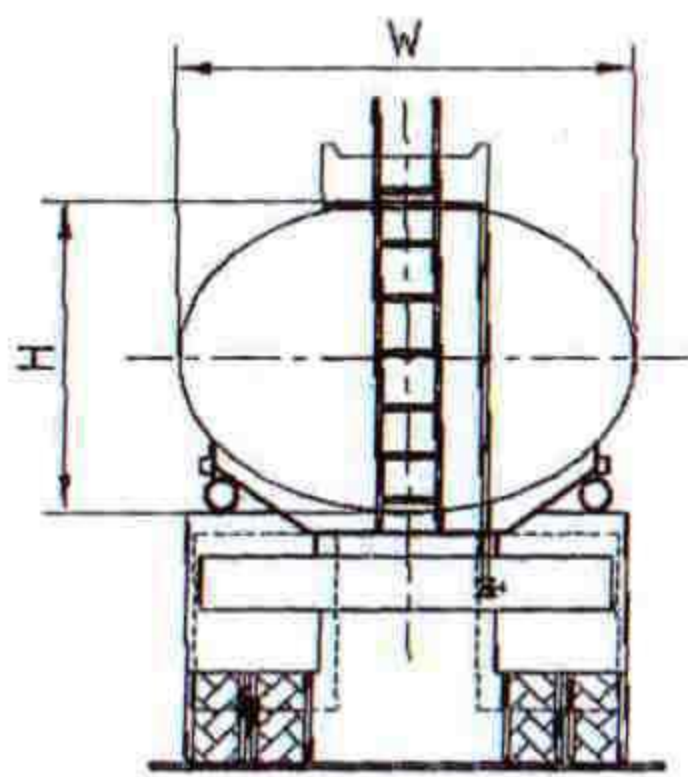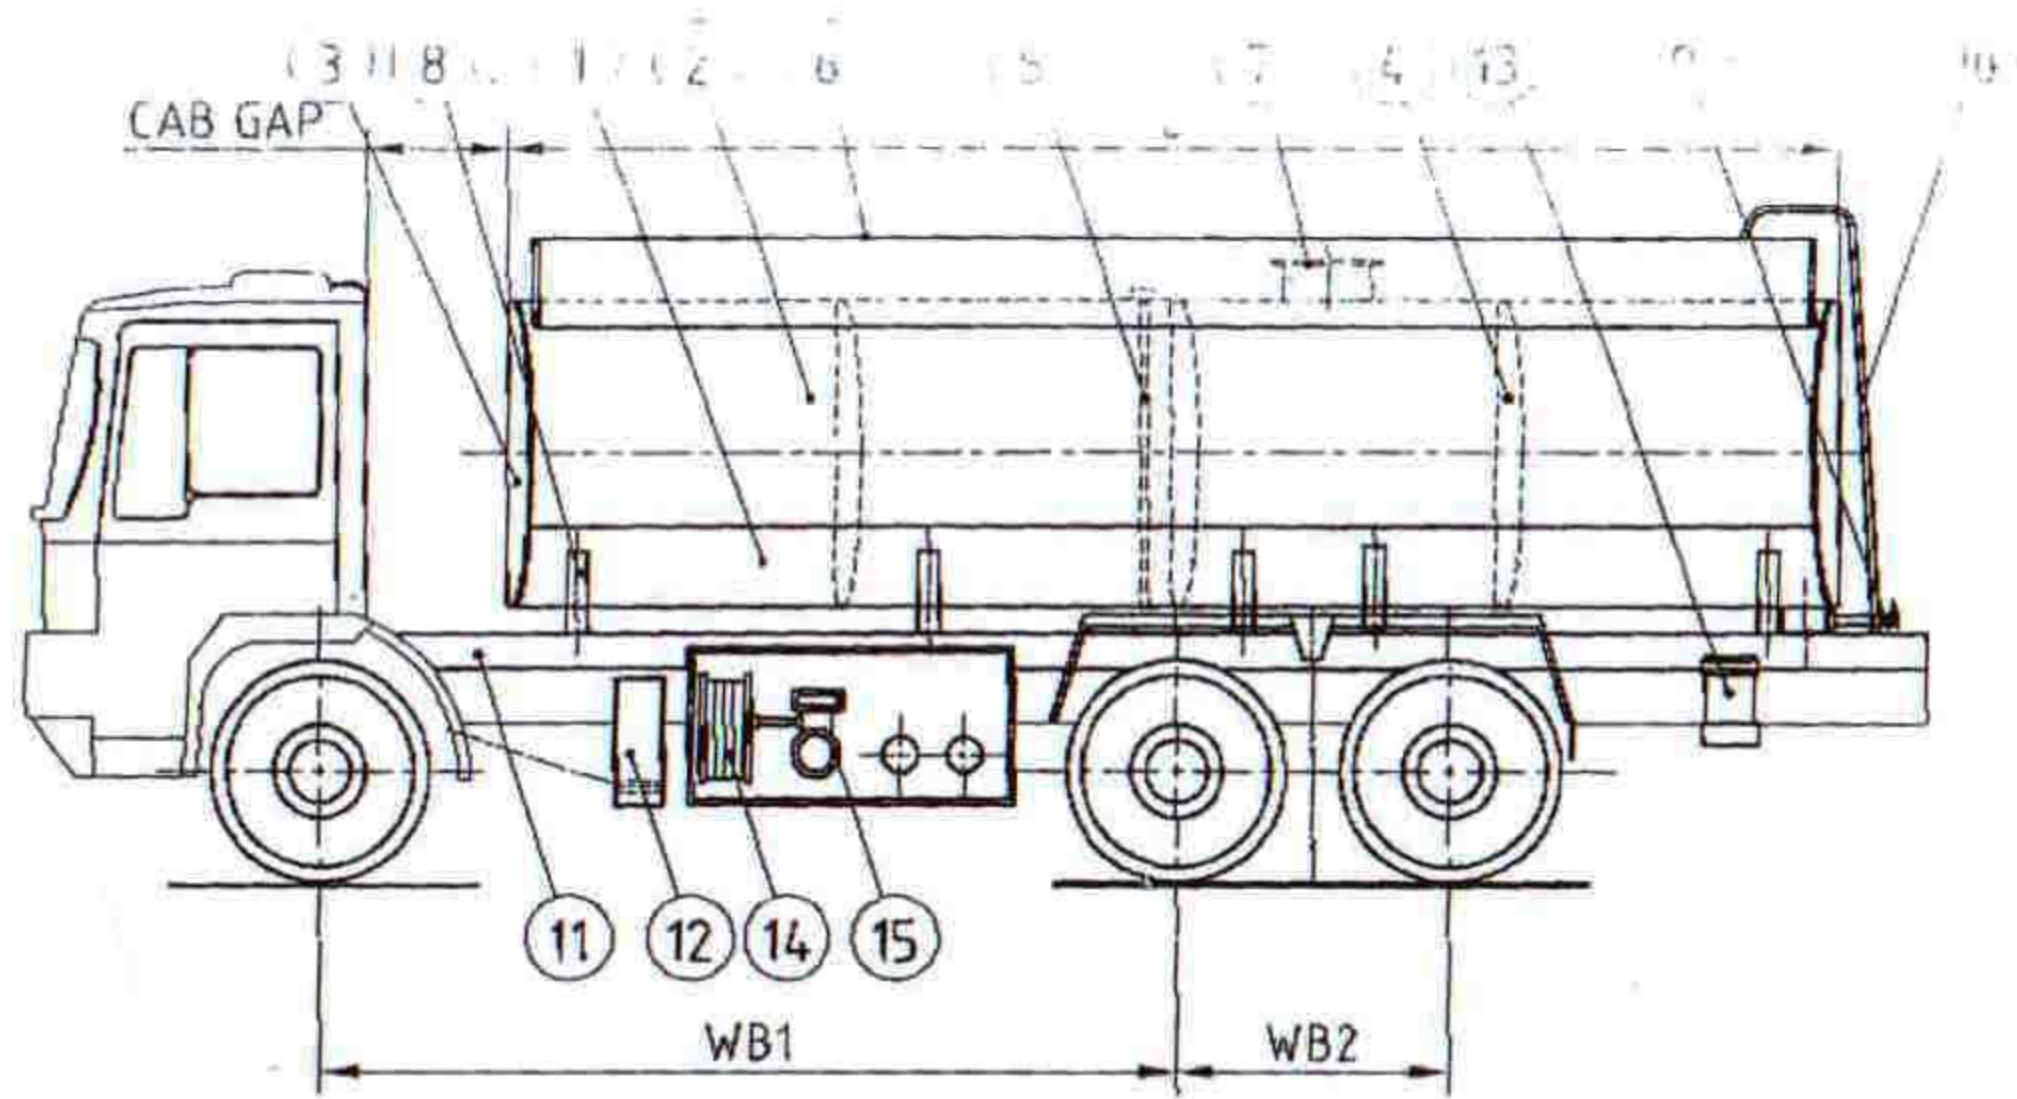



REAR VIEW

**5000 US Gallons + 5% ULLAGE
FUEL TANK ON 6 x 4 CHASSIS**

15	FLOW METER (OPTIONAL)	1
14	HOSE REEL (OPTIONAL)	1
13	FIRE EXTINGUISHER	2
12	PTO DRIVEN PUMP	1
11	SUBFRAME HOLLOW SEC.	1
10	LADDER	1
9	GRAVITY DISCHARGE	1
8	SADDLES	5
7	MANWAY	1
6	VALANCE	1
5	DIP TUBE	1
4	BAFFLES	3
3	END COVER	2
2	SIDES	1
1	BELLY	1

SR. No	DESCRIPTION	OFF
--------	-------------	-----

0	31/05/09	ARK	LSK	  CAD SCALE N.T.S.
INDEX	ALTERATION	DATE	DRAWN APPD.	



Future Services
General Trading & Contracting Co.

SPECIFICATION SHEET FOR 5000 US GALLONS FUEL TRUCKS

Fuel Tanker

Tank

Shape	: Elliptical.
Compartment	: One
Construction	: All welded steel to spec JIS-G-3101/SS 400 or equivalent. : Shell and end caps 4 mm thick. : Baffles 3 mm thick.
Baffle Plates	: Flanged, opened at top and bottom to facilitate liquid leveling
Manhole	: One on top of the tank with PV vent and safety relief.
Dipstick	: Dipstick mandrel on top of the tank with non calibrated dipstick.
Flushing	: Full length water tight rails with drain pipe at the rear.
Catwalk	: Full length of checkered plate.
Emergency Valve	: Mechanical bottom emergency valve with bottom operator.
Gravity Discharge	: Through 2 ½" valve at the rear fitted with adaptor and dust cover.
Pump	: PTO driven fuel pump, having capacity 400/700 liters/min. Vane type pump. Alfons Haar-Germany or equivalent.

Standard Accessories

Tool-box
Rear-bumper
Mud-guards around rear axle
Mud flaps behind rear wheels
Battery cut off switch in the cabin
Access ladder at the rear left side
Side-light along the body left and right
Hose stowage one at each side of the tank
Hose 2 ½"x4 meters with coupling one set
Two fire extinguisher brackets

Paint

Internal	: Nil
External	: One coat of red oxide primer and one coat of synthetic finish paint shade as per customer's choice.